// 1S

Flexible single-wall hoses, 1S type, for combustion fumes exhaust systems

Use: compensate vibration on the engine axle/ exhaust hose.
Characteristics: made of a single-layer corrugated stainless steel bellows with parallel waves to ensure that the combustion gases do not leak and an external braid to protect the hose from mechanical shocks and possible stretchings during use.
Temperature: 400 - 600 °C.
Applications: in specific high temperature scenarios, traction and compression movements, being they lateral or angled.

Other sizes can be evaluated and manufactured upon customers' request.

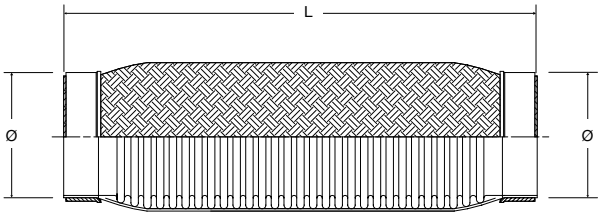

Item Code	Ø fitting size	L (length)
	mm	mm
1S0405100	40,5	100
1S0405170	40,5	170
1S0405200	40,5	200
1S0405245	40,5	245
1S0455100	45,5	100
1S0455170	45,5	170
1S0455200	45,5	200
1S0455245	45,5	245
1S0505100	50,5	100
1S0505170	50,5	170
1S0505200	50,5	200
1S0505245	50,5	245
1S0555100	55,5	100
1S0555170	55,5	170
1S0555200	55,5	200
1S0555245	55,5	245
1S0605100	60,5	100
1S0605150	60,5	150
1S0605200	60,5	200
1S0605250	60,5	250
1S0655100	65,5	100
1S0655150	65,5	150
1S0655200	65,5	200
1S0655250	65,5	250
1S0705100	70,5	100
1S0705150	70,5	150
1S0705200	70,5	200
1S0705250	70,5	250
1R0760100	76	100
1R0760150	76	150
1R0760200	76	200
1R0760250	76	250
1S0805100	80,5	100
1S0805150	80,5	150
1S0805200	80,5	200
1S0805250	80,5	250
1S0905100	90,5	100
1S0905150	90,5	150
1S0905200	90,5	200
1S0905250	90,5	240