

// 2R

**Reinforced flexible double-wall hoses, 2R type, for combustion fumes exhaust systems**


**Use:** compensate vibration on engine axle/ exhaust hose.

**Characteristics:** they are made of a double-layer corrugated stainless steel bellows with parallel waves to ensure that the combustion gases do not leak, a stainless steel stripwound hose inside the bellow to protect it from high temperatures and an external braid to protect the hose from mechanical shocks and possible stretchings during use.

**Temperature:** 700 - 900 °C.

**Applications:** in specific high temperature scenarios, traction and compression movements, being they lateral or angled.

Other sizes can be evaluated and manufactured upon customers' request.

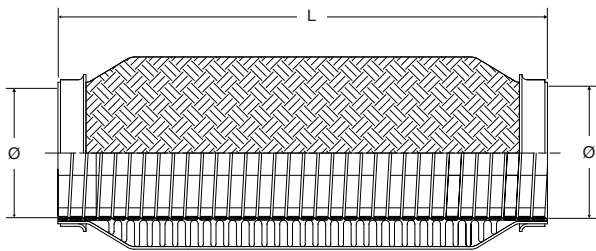

Item Code	Ø fitting size	L (length)
	mm	mm
2R0405100	40,5	100
2R0405150	40,5	150
2R0405200	40,5	200
2R0405250	40,5	250
2R0457100	45,7	100
2R0455150	45,5	150
2R0455200	45,5	200
2R0455250	45,5	250
2R0507100	50,7	100
2R0505150	50,5	150
2R0505200	50,5	200
2R0505250	50,5	250
2R0557105	55,7	105
2R0555150	55,5	150
2R0555200	55,5	200
2R0555250	55,5	250
2R0607116	60,7	116
2R0607150	60,7	150
2R0607175	60,7	175
2R0607190	60,7	190